



# NEWS

Temperature control. Smart. Reliable.

REGLOPLAS 




## Process optimization thanks to VARIO

- 200 °C variotherm temperature control applications
- Customized turn-key solutions
- Usage of standard REGLOPLAS temperature control units
- Shorten cycle times



## Individual control thanks to MULTI CIRCUIT TEMPERATURE CONTROL

- 160 °C temperature control applications
- Energy output and display per circuit
- RT100 HMI – displays all circuits at once
- 4 - 16 circuits possible
- Flow measurement with Type TF160, UF180, VFS100, (MF180)

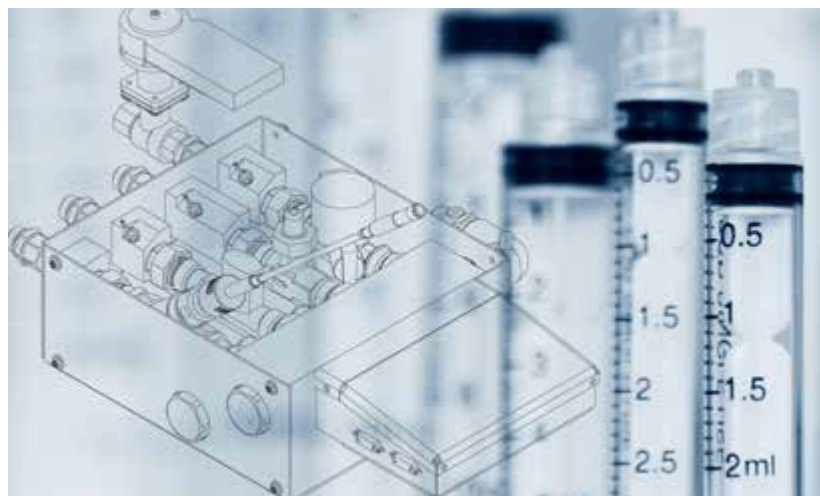

## Energy-optimized Turbo-Power thanks to SYNCHRONOUS-MOTOR PUMPS

- Up to 100% more pump pressure
- Pump efficiency > IE4
- Energy savings > 50% possible



## Optimized performance thanks to $\Delta T$ -CONTROL

- Automatic control of the temperature difference over the mould
- RT100 adapts to lowest possible energy consumption
- Automatic control of the flow

